

10/17/00
jc912 U.S. PTO

10-19-00

A

PATENT APPLICATION
Express Mail Label No. EL436467816US
Attorney Docket No. SUN-P5343-RSH

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

jc917 U.S. PTO
09/691278
10/17/00

Asst. Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

Sir:

Enclosed for filing is an ☒ original patent application or, ☐ a continuation-in-part patent application, by inventor(s) Radia J. Perlman, Stephen R. Hanna, entitled METHOD AND APPARATUS FOR PROVIDING A KEY DISTRIBUTION CENTER WITHOUT STORING LONG-TERM SERVER SECRETS.

No. of pages in Application: 26; No. of Claims: 54.

No. of Sheets of Drawings: Formal: 3, Informal: 0.

Also enclosed are:

- ☐ a claim for foreign priority under 35 U.S.C. §§ 119 and/or 365 in
- ☐ a separate document ☐ the declaration;
- ☐ a certified copy of the priority document;
- ☐ an Associate Power of Attorney;
- ☐ verified statement(s) claiming small entity status;
- ☒ a Combined Declaration and Power of Attorney of the inventors(s);
- ☐ a signed Combined Declaration and Power of Attorney of the inventors will follow;
- ☒ an Assignment document and form PTO-1595;
- ☐ a Power of Attorney by Assignee; and
- ☐ Information Disclosure Statement and Form PTO-1449.


The fee has been calculated as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEE
Basic Application Fee					\$710.00
Total Claims	54	MINUS 20 =	34	\$18.00=	\$612.00
Independent Claims	3	MINUS 3 =	0	\$80.00=	\$0.00
If multiple dependent claims are presented, add \$260.00					0
Total Application Fee					\$1322.00
If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee					
Add Recording Fee of \$40.00 if Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$1362.00

- ☒ A check in the amount of \$ 1362.00 is enclosed.
- ☐ Application fee will follow with missing parts.
- ☒ Please deduct any underpayments, credit any overpayments, and charge all required extension of time fees to Deposit Account Number 50-1003.

Please direct all correspondence concerning the above-identified application to the following address:

A. Richard Park
Park & Vaughan LLP
508 Second Street, Suite 201
Davis, CA 95616
(530) 759-1661



Respectfully submitted,

By

A. Richard Park
Registration No. 41,241

Date: October 17, 2000

5

10 **METHOD AND APPARATUS FOR PROVIDING
A KEY DISTRIBUTION CENTER WITHOUT
STORING LONG-TERM SERVER SECRETS**

Inventor(s): Radia J. Perlman and Stephen R. Hanna

15

BACKGROUND

Field of the Invention

20 The present invention relates to providing security in communications across computer networks. More specifically, the present invention relates to a method and an apparatus for providing a key distribution center for clients and servers on a computer network that operates without having to store long-term server secrets.

25

Related Art

The advent of computer networks has led to an explosion in the development of applications that transfer information between computer systems across computer networks.

One problem with sending information across computer networks is that it is hard to ensure that sensitive information is kept confidential. This is because a message containing sensitive information can potentially traverse many different computer networks and many different computer systems before it arrives at its ultimate destination. An adversary can potentially intercept a message at any of these intermediate points along the way.

One way to remedy this problem is to “encrypt” sensitive data using an encryption key so that only someone who possesses a corresponding decryption key can decrypt the data. (Note that for commonly used symmetric encryption mechanisms the encryption key and the decryption key are the same key.) For example, a person sending sensitive data across a computer network can encrypt the sensitive data using the encryption key before it is sent across a computer network. At the other end, the recipient of the data can use the corresponding decryption key to decrypt the data.

Standards, such as Kerberos, have been developed to manage hundreds and potentially thousands of different keys that can be used to encrypt communications in a distributed computer system. Under Kerberos, a system can make use of a key distribution center (KDC) that stores a long-term secret for each principal in a domain. If a principal, Alice, wants to talk to another principal, Bob, Alice authenticates to the KDC, and then requests from the KDC a session key to use to talk to Bob as well as a “ticket to Bob”. (Note that Alice can authenticate to the KDC using a password or long term secret. Alternatively, Alice can authenticate beforehand.) The “ticket to Bob” is a message to Bob encrypted with a secret shared between Bob and the KDC. This message includes Alice’s name and the session key to be used in communicating between Bob and Alice. Alice can then send Bob this “ticket to Bob” in order to enable Alice to communicate with Bob using the session key.

Kerberos also specifies how to create a “ticket granting ticket” (TGT). In order for a workstation not to keep a principal’s long term secret around for a long time, when a principal first logs on to a workstation (and presumably before he can start running potentially malicious software), the workstation requests a TGT
5 from the KDC. This TGT is encrypted with a key known to the KDC and includes the principal’s name and a session key to be used in communicating between the principal and the KDC. By using the TGT, the workstation is able, for the next several hours, to forget the principal’s long-term secret and only needs to remember the session key and the TGT. Note that it is advantageous not to
10 keep the principal’s long-term secret on the workstation for a long period of time, because the long-term secret can potentially fall into the hands of an adversary who momentarily obtains access to the workstation.

Note that using a KDC introduces a security vulnerability because someone who captures the database used by the KDC has access to all of the
15 principals’ long-term secrets. Also note that long term secrets typically include principal’s passwords and server’s pre-shared keys. Hence, momentary compromise of the KDC can allow an unauthorized party to impersonate clients and servers until these long-term secrets are changed.

It is preferable for the KDC to only maintain public keys for the principals.
20 These public keys can be used to encrypt messages so that only entities holding corresponding private keys (the principals) can decrypt the messages. Note that an adversary who captures a public key stored in the KDC is unable to decrypt a message encrypted with the public key. To this end, an Internet Engineering Task Force (IETF) draft entitled, “Public Key Cryptography for Initial Authentication in
25 Kerberos” (<http://search.ietf.org/internet-drafts/draft-ietf-cat-kerberos-pk-init-12.txt>) discloses how users can initially authenticate to the KDC with public key

cryptography by storing public keys for users at a KDC, or having users present a certificate.

Unfortunately, performing decryption using a private key is a computationally intensive task, which requires considerably more computational effort than performing decryption using a symmetric key. What is needed is a method and apparatus for facilitating encryption and decryption that provides the security of using a private key without sacrificing the performance of using a symmetric key.

10 SUMMARY

One embodiment of the present invention provides a system for operating a key distribution center (KDC) that provides keys to facilitate secure communications between clients and servers across a computer network, wherein the system operates without having to store long-term server secrets. The system operates by receiving a communication from a server at the KDC. This communication includes an identifier for the server, as well as a temporary secret key to be used in communications with the server for a limited time period. In response to the communication, the system attempts to authenticate the server. If the server is successfully authenticated, the system stores the temporary secret key at the KDC, so that the temporary secret key can be subsequently used to facilitate communications between a client and the server. Upon subsequently receiving a request at the KDC from a client that desires to communicate with the server, the system produces a session key to be used in communications between the client and server, and then creates a ticket to the server by encrypting an identifier for the client and the session key with the temporary secret key for the server. Next, the system assembles a message that includes the identifier for the server, the session key and the ticket to the server, and sends the message to the client in a

secure manner. The system subsequently allows the client to forward the ticket to the server in order to initiate communications between the client and the server.

In a variation on this embodiment, upon receiving the ticket from the client, the server decrypts the ticket using the temporary secret key to restore the session key and the identifier for the client. The server then uses the session key to protect subsequent communications between the server and the client.

In a variation on this embodiment, assembling the message involves including an expiration time for the session key in the message.

In a variation on this embodiment, allowing the client to forward the ticket
10 to the server involves allowing the client to forward an identifier for the temporary
secret key to the server, so that the server can know which temporary secret key to
use in decrypting the ticket.

In a variation on this embodiment, sending the message to the client in the secure manner involves encrypting the message with a second session key that was previously communicated to the client by the KDC under protection of a password supplied by a user of the client.

In a variation on this embodiment, the system alternatively creates the ticket to the server by encrypting the identifier for the client and the session key with a public key for the server.

20 In a variation on this embodiment, the system alternatively creates the ticket to the server by encrypting the identifier for the client and the session key with a secret key for the server previously agreed upon between the server and the KDC and stored at the KDC.

In a variation on this embodiment, authenticating the server includes using authentication information pertaining to the server. This authentication information includes a certificate chain from a trust anchor to the server, and

includes a server public key that is associated with a server private key to form a public key-private key pair associated with the server.

In a variation on this embodiment, authenticating the server involves authenticating the server without having prior configuration information
5 pertaining to the server at the KDC.

In a variation on this embodiment, authenticating the server involves using a server public key that is stored locally in the KDC.

In a variation on this embodiment, the temporary secret key is encrypted with a public key belonging to the KDC, so that the temporary secret key can only
10 be decrypted using a private key belonging to the KDC.

In a variation on this embodiment, the communication is signed with a server private key so that the KDC can use a corresponding server public key to verify that the communication was sent by the server.

In a variation on this embodiment, the communication is received in response to a request being sent by the KDC to the server indicating that the
15 temporary secret key is needed from the server.

In a variation on this embodiment, the system additionally communicates information to the server that enables the server to authenticate the KDC.

In a variation on this embodiment, the KDC operates in accordance with
20 the Kerberos standard.

BRIEF DESCRIPTION OF THE FIGURES

FIG. 1 illustrates a distributed computing system in accordance with an embodiment of the present invention.

FIG. 2 illustrates the process of communicating a temporary secret key for
25 a server to a KDC in accordance with an embodiment of the present invention.

FIG. 3 illustrates how the temporary secret key is stored at the KDC in accordance with an embodiment of the present invention.

FIG. 4 illustrates how a client communicates with the KDC in accordance with an embodiment of the present invention.

5 FIG. 5 illustrates how the client communicates with the server in accordance with an embodiment of the present invention.

DETAILED DESCRIPTION

10 The following description is presented to enable any person skilled in the art to make and use the invention, and is provided in the context of a particular application and its requirements. Various modifications to the disclosed embodiments will be readily apparent to those skilled in the art, and the general principles defined herein may be applied to other embodiments and applications without departing from the spirit and scope of the present invention. Thus, the
15 present invention is not intended to be limited to the embodiments shown, but is to be accorded the widest scope consistent with the principles and features disclosed herein.

20 The data structures and code described in this detailed description are typically stored on a computer readable storage medium, which may be any device or medium that can store code and/or data for use by a computer system. This includes, but is not limited to, magnetic and optical storage devices such as disk drives, magnetic tape, CDs (compact discs) and DVDs (digital versatile discs or digital video discs), and computer instruction signals embodied in a transmission medium (with or without a carrier wave upon which the signals are modulated).
25 For example, the transmission medium may include a communications network, such as the Internet.

Distributed Computing System

FIG. 1 illustrates a distributed computing system 100 in accordance with an embodiment of the present invention. Distributed computing system 100 includes clients 104-105, servers 106-107 and key distribution center (KDC) 102 which are all coupled together through network 108.

Network 108 can generally include any type of wire or wireless communication channel capable of coupling together computing nodes. This includes, but is not limited to, a local area network, a wide area network, or a combination of networks. In one embodiment of the present invention, network 108 includes the Internet.

Clients 104-105, servers 106-107 and KDC 102 can generally include any type of computer system, including, but not limited to, a computer system based on a microprocessor, a mainframe computer, a digital signal processor, a portable computing device, a personal organizer, a device controller, and a computational engine within an appliance. Note that KDC 102 may be located on a dedicated computer system, or alternatively, may be hosted on a shared computer system.

Clients 104-105 can generally include any node on network 108 including computational capability and including a mechanism for communicating across the network 108. Note that client 104 is identified with a principal 109 named "Alice". In general, a principal may include a user, a process, a program or any other entity recognized within this system. Also note that a principal need not have a name, such as "Alice", but can instead be identified using some other type of identifier, such as a number. Servers 106-107 can generally include any nodes on network 108 including a mechanism for servicing requests from a client for computational and/or data storage resources. Note that server 106 is identified with a principal 115 named "Bob".

Attorney Docket No. SUN-P5343-RSH

KDC 102 is a server that supplies and manages encryption keys for use in facilitating communications between clients 104-105 and servers 106-107. KDC 102 is coupled to a database 110. Database 110 can include any type of system for storing data in volatile or non-volatile storage. This includes, but is not limited to, systems based upon magnetic, optical, and magneto-optical storage devices, as well as storage devices based on flash memory, battery-backed up memory and other types of volatile or non-volatile memory. Database 110 stores a number of different types of keys that can be used to communicate with principals 104-107. These different types of keys include long-term secrets 112, public keys 113 and temporary secrets 114.

Long-term secrets 112 are secrets that are shared between KDC 102 and principals 104-107 that enable KDC 102 to communicate securely with principals 104-107. Note that storing long-term secrets 112 gives rise to a security problem because an adversary who obtains access to database 110 is able to access all of the principals' long-term secrets. The adversary may use these long-term secrets for many unauthorized purposes, such as impersonating principals in communications with the KDC or other parties.

Public keys 113 are public keys for principals 104-107 that enable KDC 102 to communicate with principals 104-107. Alternatively, public keys 113 can include public keys for trust anchors that may be used to authenticate principals 104-107. In this case, the public keys for principals 104-107 need not be stored at KDC 102.

Short-term secrets 114 are secrets of limited duration that are shared between KDC 102 and principals 104-107. Storing short-term secrets 114 creates less vulnerability than storing long-term secrets 112, because the short-term secrets 114 will eventually become invalid after a short time period.

an expiration time for TK_B , and a key identifier, KEY_ID . Server 106 signs this message with the private key belonging to Bob, $PRIV_B$, and sends the signed message to KDC 102. (Note in the figures that $x[msg]$ represents msg signed with the key x , whereas $x\{msg\}$ represents msg encrypted with the key x .)

5 KDC 102 verifies the signature on the signed message using Bob's public key, PUB_B . Then it decrypts the encrypted temporary secret key, EK , using the KDC's private key, $PRIV_{KDC}$, and stores the identifier, TK_B , KEY_ID , and the expiration time for TK_B , indexed by the identifier "Bob", in database 110 so that TK_B can be used in subsequent communications with Bob.

10 The above-described process is initiated periodically (for example, every hour) by server 106 because each temporary secret key is only valid for a limited time period. Alternatively, the above-described process can be initiated in response to a request for a new temporary secret key generated by KDC 102 whenever KDC 102 requires a new temporary secret key for server 106. In yet a further alternative, KDC 102 can encrypt the ticket to Bob using Bob's public key, and if Bob does not like the overhead of decrypting using the corresponding private key, Bob can establish a temporary secret key with KDC 102. These two alternatives are especially useful when Bob is rarely accessed through KDC 102, since they avoid the overhead of periodically establishing a new temporary secret key.

15

20

 If there are multiple KDCs serving principals 104-107, the multiple KDCs must somehow synchronize the temporary secret key database between themselves, or a server 106 must communicate a temporary secret key to each KDC individually. Note that server 106 may communicate different temporary secret keys with different KDCs.

25

 If each KDC has a different secret key, either Bob must perform a trial decryption for each possible secret key, or an identifier for the temporary secret

key must be sent in the clear along with an encrypted message. This identifier enables Bob to determine which temporary secret key to use in decrypting the encrypted message. The identifier is also useful during a transition period shortly after changing Bob's temporary secret key.

5

Storage Structure for Temporary Secret Key

FIG. 3 illustrates how the temporary secret key, TK_B , is stored in database 110 at KDC 102 in accordance with an embodiment of the present invention. For each temporary secret key, database 110 stores a record 300. This record 300
10 includes an identifier 302, a key 304, an expiration time 306 and an ID for the key 308. The identifier 302 can include a character string that identifies a principal, such as "Bob". Key 304 holds the temporary secret key associated with the principal, TK_B . Expiration time 306 specifies an expiration time for TK_B . Finally, the ID for the key 308 specifies an identifier for TK_B .

15 Note that Bob also has to remember the temporary secret key, TK_B , preferably indexed by KEY_ID . In doing so, Bob can use a similar storage structure, possibly without the identifier, "Bob."

Communication Between Client and KDC

20 FIG. 4 illustrates how client 104 communicates with KDC 102 in accordance with an embodiment of the present invention. In this example, a principal 109, Alice, associated with a client 104 requests to login to a server, Bob. Client 104 sends to KDC 102 a request to talk to Bob.

Upon receiving this request, KDC 102 creates a session key, K_{AB} , to be
25 used in communications between Alice and Bob. Next, KDC 102 retrieves Bob's temporary secret key, TK_B , and then creates a "ticket to Bob" by using TK_B to

encrypt the identifier for "Alice" and K_{AB} , and by attaching the key identifier for TK_B , KEY_ID , in the clear.

KDC 102 then creates a message containing an identifier "Bob", K_{AB} , and the ticket to Bob, and then encrypts the message using the master key for Alice, S_A (a function of Alice's password), before sending the message to client 104. Upon receiving this message, client 104 decrypts it using S_A to restore the identifier, "Bob", K_{AB} , and the ticket to Bob.

Communication Between Client and Server

FIG. 5 illustrates how client 104 communicates with server 106 after receiving the encrypted message from KDC 102 in accordance with an embodiment of the present invention.

In order to facilitate communications between Alice and Bob, client 104 sends the ticket to Bob to server 106. Server 106 uses the key identifier KEY_ID , to look up the temporary secret key, TK_B . Server 106 then uses TK_B to decrypt the ticket to Bob to restore K_{AB} and "Alice". Server 106 subsequently uses K_{AB} in communications with client 104. If client 104 can prove it knows K_{AB} , Bob will know client 104 is associated with Alice.

Note that additional steps dealing with time stamps have been omitted from the above discussion related to FIGs. 4-5.

Also note that from Alice's perspective nothing changes in the process outlined in FIGs. 4 and 5 from standard Kerberos, because Alice is oblivious as to whether a temporary secret key or a permanent secret key is used to encrypt the ticket to Bob. Only KDC 102 and server 106 need to be aware of the fact that a temporary secret key has been used instead of a permanent secret key.

Additionally, note that Alice can use a TGT in communicating with the KDC.

The foregoing descriptions of embodiments of the invention have been presented for purposes of illustration and description only. They are not intended to be exhaustive or to limit the present invention to the forms disclosed.

Accordingly, many modifications and variations will be apparent to practitioners
5 skilled in the art. Additionally, the above disclosure is not intended to limit the present invention. The scope of the present invention is defined by the appended claims.

What Is Claimed Is:

1 1. A method for operating a key distribution center (KDC) that
2 provides keys to facilitate secure communications between clients and servers
3 across a computer network, wherein the KDC operates without having to store
4 long-term server secrets, comprising:
5 receiving a communication that is authenticated from a server at the KDC;
6 wherein the communication includes a temporary secret key to be used in
7 communications with the server for a limited time period; and
8 storing the temporary secret key at the KDC, so that the temporary secret
9 key can be subsequently used to facilitate communications between a client and
10 the server.

1 2. The method of claim 1, wherein upon subsequently receiving a
2 request from the client at the KDC to communicate with the server, the method
3 further comprises facilitating communications between the client and the server
4 by:
5 producing a session key to be used in communications between the client
6 and server;
7 creating a ticket to the server by encrypting an identifier for the client and
8 the session key with the temporary secret key for the server; and
9 assembling a message that includes the identifier for the server, the session
10 key and the ticket to the server; and
11 sending the message to the client in a secure manner; and
12 allowing the client to forward the ticket to the server in order to initiate
13 communications between the client and the server.

9. The method of claim 8, wherein authenticating the server involves using authentication information pertaining to the server, the authentication information including a certificate chain from a trust anchor to the server, and including a server public key that is associated with a server private key to form a public key-private key pair associated with the server.

1 10. The method of claim 8, wherein authenticating the server involves
2 authenticating the server without having prior configuration information
3 pertaining to the server at the KDC.

1 11. The method of claim 8, wherein authenticating the server includes
2 using a server public key that is stored locally in the KDC.

1 12. The method of claim 1, wherein the temporary secret key is
2 encrypted with a public key belonging to the KDC, so that the temporary secret
3 key can only be decrypted using a private key belonging to the KDC.

1 13. The method of claim 1, wherein the communication is signed with
2 a server private key so that the KDC can use a corresponding server public key to
3 verify that the communication was sent by the server.

1 14. The method of claim 1, wherein the communication is received in
2 response to a request being sent by the KDC to the server indicating that the
3 temporary secret key is needed from the server.

21. The computer-readable storage medium of claim 20, wherein upon receiving the ticket from the client at the server, the method further comprises:

- decrypting the ticket at the server using the temporary secret key to restore the session key and the identifier for the client; and
- using the session key at the server to protect subsequent communications between the server and the client.

1 22. The computer-readable storage medium of claim 20, wherein
2 assembling the message involves including an expiration time for the session key
3 in the message.

1 23. The computer-readable storage medium of claim 20, wherein
2 allowing the client to forward the ticket to the server includes allowing the client

Attorney Docket No. SUN-P5343-RSH

1 35. The computer-readable storage medium of claim 19, wherein the
2 communication received from the server additionally includes an identifier for the
3 server.

1 36. The computer-readable storage medium of claim 19, wherein the
2 method further comprises propagating the temporary secret key to multiple KDCs.

1 37. An apparatus that provides keys to facilitate secure
2 communications between clients and servers across a computer network, wherein
3 the apparatus operates without having to store long-term server secrets,
4 comprising:

5 a key distribution center (KDC);

6 a receiving mechanism within the KDC that is configured to receive a
7 communication from a server;

8 wherein the communication includes a temporary secret key to be used in
9 communications with the server for a limited time period; and

10 a storage mechanism within the KDC that is configured to store the
11 temporary secret key at the KDC, so that the temporary secret key can be
12 subsequently used to facilitate communications between a client and the server.

1 38. The apparatus of claim 37, further comprising a communication
2 facilitation mechanism within the KDC, wherein upon receiving a request from
3 the client to communicate with the server, the communication facilitation
4 mechanism is configured to:

5 produce a session key to be used in communications between the client
6 and server;

METHOD AND APPARATUS FOR PROVIDING A KEY DISTRIBUTION CENTER WITHOUT STORING LONG-TERM SERVER SECRETS

ABSTRACT

One embodiment of the present invention provides a system for operating a key distribution center (KDC) that provides keys to facilitate secure communications between clients and servers across a computer network, wherein the system operates without having to store long-term server secrets. The system operates by receiving a communication from a server at the KDC. This communication includes an identifier for the server, as well as a temporary secret key to be used in communications between a client and the server for a limited time period. In response to the communication, the system attempts to authenticate the server. If the server is successfully authenticated, the system stores the temporary secret key at the KDC, so that the temporary secret key can be subsequently used to facilitate communications with the server. Upon subsequently receiving a request at the KDC from a client that desires to communicate with the server, the system produces a session key to be used in communications between the client and server, and then creates a ticket to the server by encrypting an identifier for the client and the session key with the temporary secret key for the server. Next, the system assembles a message that includes the identifier for the server, the session key and the ticket to the server, and sends the message to the client in a secure manner. The system subsequently allows the client to forward the ticket to the server in order to initiate communications between the client and the server.

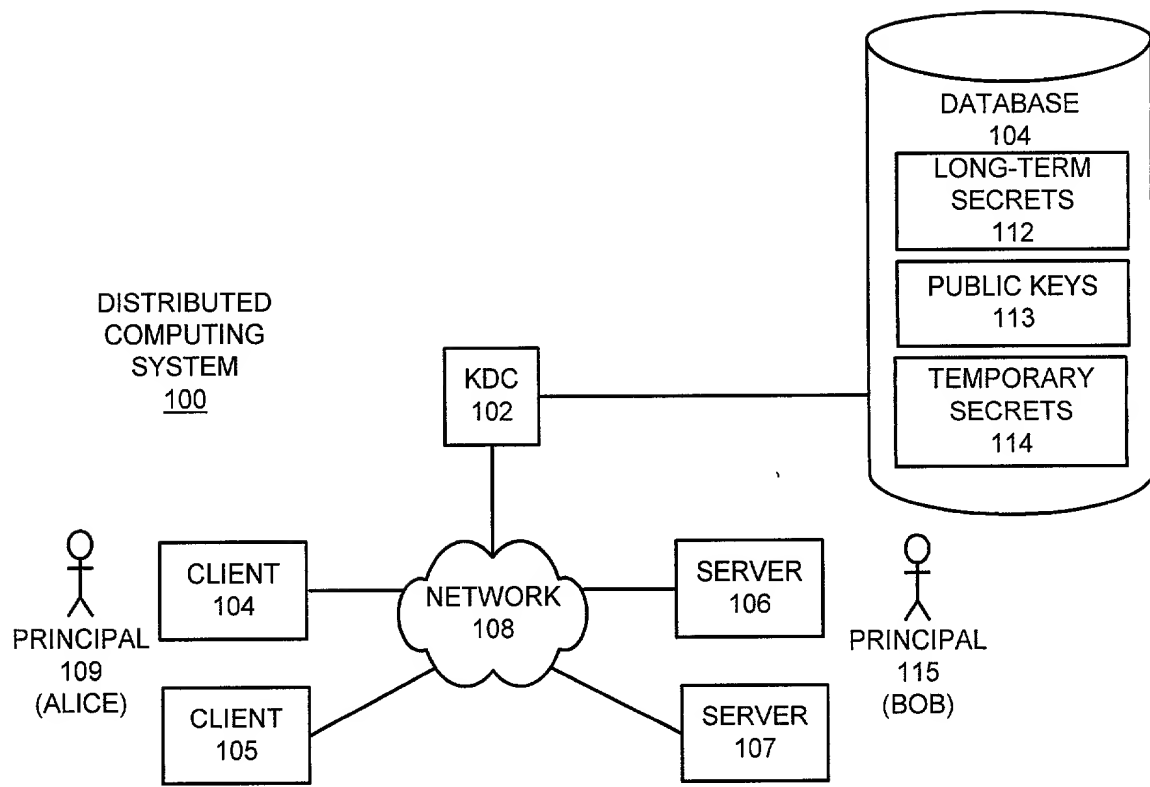


FIG. 1

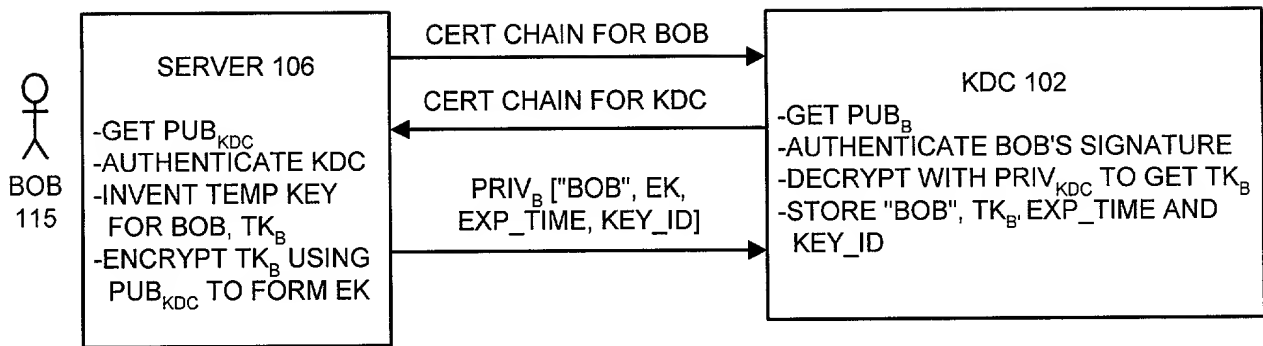


FIG. 2

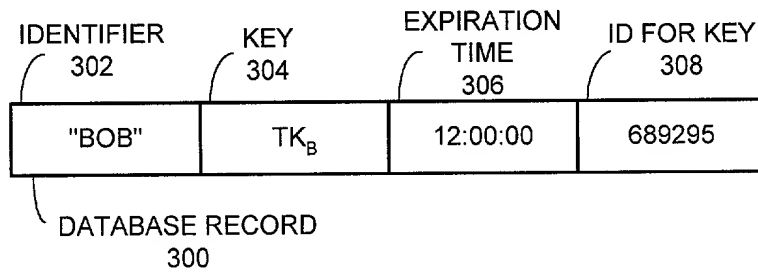


FIG. 3

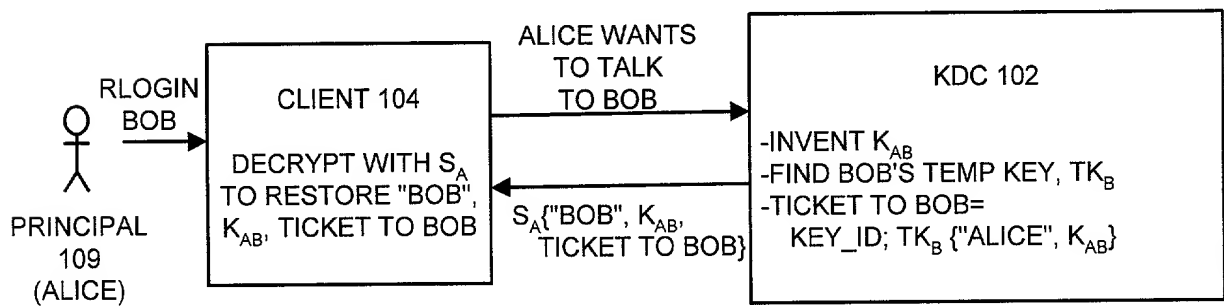


FIG. 4

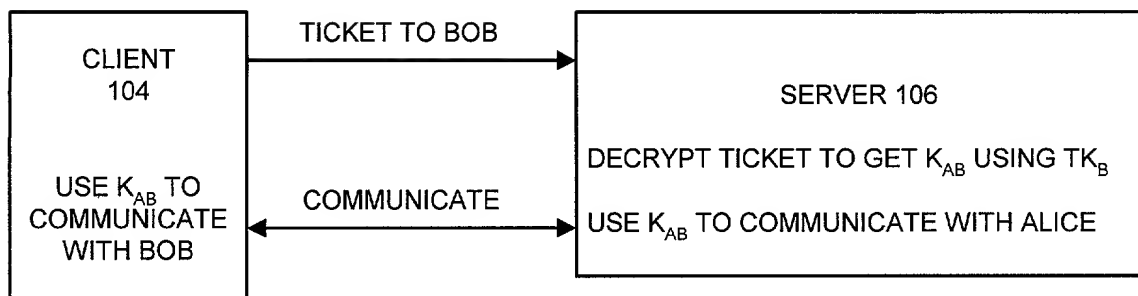


FIG. 5

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below by my name;

I believe I am the original, first and sole inventor, if only one name is listed below, or an original, first and joint inventor if multiple names are listed below, of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND APPARATUS FOR PROVIDING A KEY DISTRIBUTION CENTER WITHOUT STORING LONG-TERM SERVER SECRETS

for which a patent application:

☒ is attached hereto.

☐ was filed in the United States on _ as Application No. ____;

☐ with amendment(s) filed on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the application identified above, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information known to me to be material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56, which states in relevant part:

Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section.... The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office....

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d), of any foreign application(s) for patent or inventor's certificate as indicated below and have also identified below any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

EARLIEST FOREIGN APPLICATION(S), IF ANY, FILED PRIOR TO THE FILING DATE OF THE APPLICATION			
APPLICATION NUMBER	COUNTRY	DATE OF FILING (Day, Month, Year)	PRIORITY CLAIMED
			YES <input type="checkbox"/> NO <input type="checkbox"/>

I hereby claim the benefit under Title 35, United States Code, §119(e), of any United States provisional application(s) listed below:

APPLICATION NUMBER	DATE OF FILING

I hereby claim the benefit under Title 35, United States Code, §120, of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information that is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION NUMBER	DATE OF FILING	STATUS		
		PATENTED	PENDING	ABANDONED

I hereby appoint Daniel E. Vaughan (Reg. No. 42,199) and A. Richard Park (Reg. No. 41,241) to prosecute this application

and transact all business in the Patent and Trademark Office connected therewith, and to file, prosecute and transact all business in connection with international applications directed to said invention.

Address correspondence to:
Park & Vaughan LLP
508 Second Street, Suite 201
Davis, CA 95616



Direct telephone calls to:
 A. Richard Park
 (530) 759-1661

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1	Name and Citizenship	Radia J. Perlman	United States of America
	Residence Address	10 Huckleberry Lane, Acton, MA 01720	
	Postal Address (if different from Residence)		
	Signature and Date	<i>Radia J. Perlman</i>	Date 10/13/00
2	Name and Citizenship	Stephen R. Hanna	United States of America
	Residence Address	3 Beverly Road, Bedford, MA 01730	
	Postal Address (if different from Residence)		
	Signature and Date	<i>Stephen R. Hanna</i>	Date October 13, 2000
3	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date
4	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date
5	Name and Citizenship		
	Residence Address		
	Postal Address (if different from Residence)		
	Signature and Date		Date

Additional inventor name(s) and signature(s) attached?: YES ☐ NO ☒